

GV-BX2600 2MP H.264 Super Low Lux WDR D/N Box IP Camera



- 1/2.8" progressive scan super low lux CMOS
- Min. illumination at 0.02 lux
- Dual streams from H.264 and MJPEG
- Up to 60 fps at 1920 x 1080
- 2-way audio
- One sensor input and alarm output
- TV-out support
- Built-in micro SD card slot (SD/SDHC) for local storage
- Mini USB slot for WiFi Adapter or USB hard drive
- Wide Dynamic Range (WDR) Pro
- 3D noise reduction
- Motion detection
- Tampering alarm
- Video Analytics
- Privacy mask
- IP address filtering
- DC 12V / PoE (IEEE 802.3af)
- Removable IR-cut filter for Day/Night function
- Varifocal megapixel lens
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF (Profile S) conformant


* No Memory card slot & local storage function for Argentina.

* GV-VMS V15.10 (coming) is required for Video Analytics function

Introduction

The GV-BX2600 is an indoor IP camera, available in fixed focal as well as varifocal lenses. The camera is equipped with a super low lux CMOS image sensor which allows the camera to provide a color live view in near darkness. The camera features a mini USB port which supports wireless connection through a GV-WiFi Adapter (optional) or external storage using a USB hard drive.

Dimensions

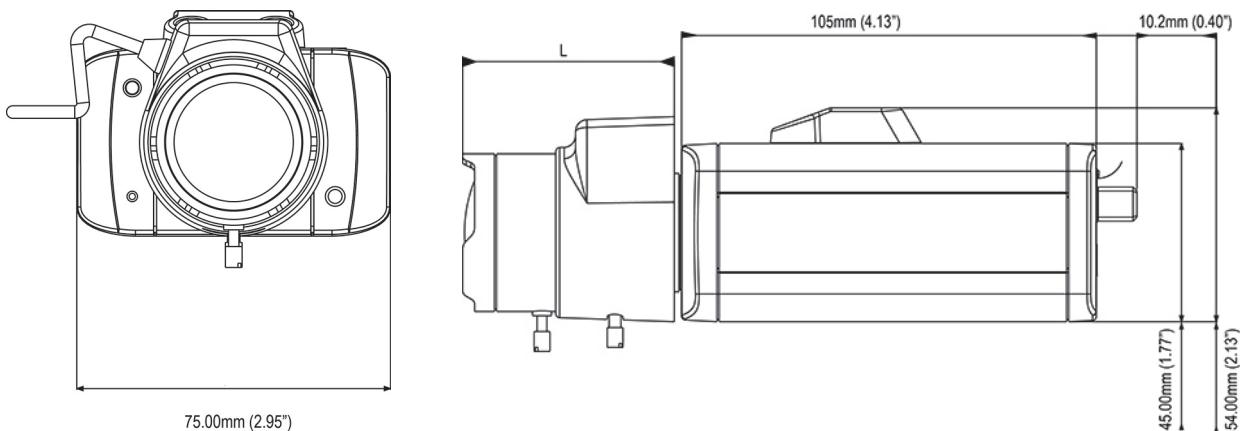

Specifications

Camera		GV-BX2600
Image Sensor	1/2.8" progressive scan super low lux CMOS	
Picture Elements	1920 (H) x 1080 (V)	
Minimum Illumination	Color B/W	0.02 Lux
	IR ON	0 Lux

Shutter Speed	Automatic, Manual (1/5 ~ 1/8000 sec)	
White Balance	Automatic, Manual (2800 ~ 8500K)	
Gain Control	Automatic	
S/N Ratio	52 dB	
WDR Pro	Yes (with WDR sensor)	
Dynamic Range	Up to 100 dB	
Lens		
Megapixel	Yes	
Day/Night	Yes (with removable IR-cut filter)	
Lens Type	Varifocal	
Focal Length	3 ~ 10.5 mm	
Maximum Aperture	F/1.4	
Mount	CS Mount	
Image Format	1/2.7"	
Horizontal FOV	96° ~ 34°	
Operation	Focus	Manual (w/lock)
	Zoom	Manual (w/lock)
	Iris	DC drive
Torque (Focus/Zoom screws)	0.049 N.m	
Operation		
Video Compression	H.264, MPEG4	
Video Streaming	Dual streams from H.264 or MJPEG	
Frame Rate	60 fps 1920 x 1080 * The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).	
Image Setting	Brightness, Contrast, Saturation, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Shutter Speed, D/N Sensitivity, Video Analytics	
Video Analytics	Motion Detection, Advanced Video Analytics (Intruder, People Count, Loitering), Unattended Object Detection, Missing Object Detection	
Audio Compression	G.711	
Audio Support	Two-Way Audio	
Sensor Input	1 input (Dry Contact)	
Alarm Output	1 Digital Output (200mA 5V DC)	
Video Resolution		
Main Stream	4:3	1280 x 960, 640 x 480, 320 x 240
	16:9	1920 x 1080, 1280 x 720, 640 x 360, 448 x 256
	5:4	1280 x 1024, 640 x 512, 320 x 256
Sub Stream	4:3	640 x 480, 320 x 240
	16:9	640 x 360, 448 x 256
	5:4	640 x 512, 320 x 256
Network		
Interface	10/100 Ethernet	
Protocol	DHCP, DynDNS, FTP, HTTP, HTTPS, NTP, ONVIF (Profile S), PSIA, QoS (DSCP), RTSP, SNMP, SMTP, TCP, UDP, UPnP, 3GPP/ISMA	
Wireless LAN	IEEE 802.11 b/g/n	
Antenna Type	External	
Security	WEP, WPA-PSK(TKIP), WPA-PSK(AES), WPA2-PSK(TKIP), WPA2-PSK(AES)	
Mechanical		
Temperature Detector	Yes	
Connectors	Power	2-pin terminal block, PoE
	Ethernet	RJ-45
	Audio	1 In (Externally connecting a microphone) 1 Out (Stereo phone jack, 3.5 mm / 0.14")
	Digital I/O	3-pin terminal block, pitch 2.5 mm (0.1")
	Auto Iris	Yes (with varifocal lens)
	Local Storage	Micro SD card slot (SD/SDHC, SD version 2.0 only, Class 10) *SDXC and UHS-I card types are not supported.
	TV-Out	BNC connector (640 x 480 resolution)
	Mini USB	GV-WiFi Adapter or USB hard drive
LED Indicator	2 LEDs: Power, Status	

General

Operating Temperature	0 °C ~ 50 °C (32 °F ~ 122 °F)
Humidity	10% to 90% (no condensation)
Power Source	12V DC / PoE (IEEE 802.3af)
Max. Power Consumption	7.5 W
Dimensions (without lens)	105 x 75 x 54 mm (4.13" x 2.95" x 2.13")
Weight	321 g (0.71 lb)
Regulatory	CE, RCM, FCC, LVD, RoHS compliant

Power over Ethernet

PoE Standard	PoE (IEEE 802.3af Class 3 Power over Ethernet / PD)
PoE Power Supply Type	End-Span
PoE Power Output	Per Port 48V DC, 350mA. Max. 15.4 watts

Web Interface

Installation Management	Web-based configuration
Web Browser	Microsoft Internet Explorer 11 or later / Google Chrome / Mozilla Firefox / Safari
Maintenance	Firmware upgrade through Web Browser or Utility
Access from Web Browser	Camera Live View, Video Recording, Change Video Quality, Bandwidth Control, Image Snapshot, Digital I/O control, Audio, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Text Overlay, Digital PTZ
Language	Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish

Applications

Network Storage	GV-System (GV-DVR / GV-NVR), GV-VMS, GV-Backup Center, GV-Recording Server
Smart Device Access	GV-Eye for iOS and Android
Live Viewing	IE, mobile phone
CMS Server support	GV-Control Center, GV-Center V2, GV-Vital Sign Monitor

Note:


1. The signal range and data throughput may vary depending on the network conditions and environmental factors.
2. Mind the following limitations and requirements for the mini USB port:
 - The USB hard drive must be of 2.5" or 3.5", version 2.0 or above
 - The USB hard drive's storage capacity must not exceed 2TB
 - USB flash drives and USB hubs are not supported
 - External power supply is required for the USB hard drive
 - To connect a GV-WiFi Adapter, make sure it is connected before the camera is powered on.
3. Specifications are subject to change without notice.
4. Mind the following when using a memory card for recording:
 - Recorded data on the memory card can be damaged or lost if the data are accessed while the camera is under physical shock, power interruption, memory card detachment or when the memory card reaches the end of its lifespan. No guarantee is provided for such causes.
 - The stored data can be lost if the memory card is not accessed for a long period of time. Back up your data periodically if you seldom access the memory card.
 - Memory cards are expendable and their durability varies according to the conditions of the installed site and how they are used. Back up your data regularly and replace the memory card annually.
 - To avoid power outage, it is highly suggested to apply a battery backup (UPS).
 - For better performance, it is highly suggested to use Micro SD card of MLC NAND flash, Class 10.
 - Replace the memory card when its read/write speed is lower than 6 MB/s or when the memory card is frequently undetected by the camera.
5. When GV-BX2600 uses Micro SD card or USB HDD for recording, the camera must not have more than one connection to GeoVision or third-party software.
6. Mind the following restrictions, without regard to the resolution of the camera images, when the GV-BX2600 camera is set to 60 fps:
 - The codec MJPEG is not available in the main stream.
 - Dual streaming is not supported.
 - Video analysis functions, including motion detection, are not supported.
 - TV-out is not supported.
 - The frame rate will be dropped to 30 fps during live streaming and recording when the camera starts monitoring.
 - WDR Pro function is not supported.
 - 1 or 2 fps will be dropped on the point of obtaining snapshots in JPEG format with the CGI command.

Packing List

1. Box Camera
2. Terminal Block
3. Fixed Focal or Varifocal Megapixel Lens
4. Six Lens Rings
5. Video Out Wire
6. Camera Holder
7. Holder Screw x 2
8. Power Adapter
9. GV-IPCAM H.264 Quick Start Guide
10. GV-IPCAM H.264 Software DVD
11. GV-NVR Quick Start Guide
12. GV-NVR Software DVD

Note: The power adapter can be excluded upon request.

Accessories

Model No. Name	Details
GV-Mount300	<p>Convex Corner Adapter Kit</p>  <p>Dimensions: 238.6 x 409.5 mm (9.4" x 16.1") Weight: 4.27 kg (9.41 lb)</p>
GV-Mount310	<p>Concave Corner Adapter Kit</p>  <p>Dimensions: 123.3 x 393.1 mm (4.9" x 15.5") Weight: 2.96 kg (6.53 lb)</p>
GV-Mount400	<p>Pole Mount Bracket Kit (\varnothing 4" ~ 6")</p>  <p>Bracket Dimensions: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: \varnothing 4" ~ 6"</p>
GV-Mount410	<p>Pole Mount Bracket Kit (\varnothing 6" ~ 7.5")</p>  <p>Bracket Dimensions: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: \varnothing 6" ~ 7.5"</p>
GV-Housing101	<p>Housing Box (with heater and fan)</p> <p>IP67 IK10</p>  <p>Dimensions: 406 x 145 x 109 mm (16 x 5.7 x 4.3") Weight: 4.69 kg (10.34 lbs) (including Supporting Tube) Start-up Temperature: -30°C ~ 50°C (-22°F ~ 122°F) Operation Temperature: -40°C ~ 50°C (-40°F ~ 122°F) Heater: 15°C (59°F) On / 25°C (77°F) Off Fan: 35°C (95°F) On / 25°C (77°F) Off Power board: 24V AC or 12V DC input</p>

Model No. Name	Details
GV-PA191 PoE Adapter	<p>Weight: 130 g / 0.29 lb Dimensions (H x W x D): 43 x 69 x 40 mm / 1.69 x 2.72 x 1.57 in</p> 
GV-WiFi Adaptor	<p>Weight: 20 g / 0.04 lb Dimensions (H x W x D): 15 x 15 x 155 (mm) / 0.59 x 0.59 x 6.10 (in) Supplied with mini USB to standard USB adapter.</p> 
GV-Relay V2	<p>The GV-Relay V2 is designed to expand the voltage load of GV IP devices. It provides 4 relay outputs, and each can be set as normally open (NO) or normally closed (NC) independently as per your requirement.</p> 
Power Adapter	<p>Power adapters are available in 5 regions: Australia, Brazil, Europe, U.K and U.S.</p>
GV-POE Switch	<p>The GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.</p>