



# All-in-One Panoramic PTZ Series

All the Details and Object Tracking with one simple click

- 12MP Fisheye + 2MP PTZ Hybrid Camera
- Fisheye Panoramic View
- Wide Working Temperature Range
- IP67 Ingress Protection & IK10 Vandal Resistance
- 20x / 30x Optical Zoom
- Intuitive PTZ Control
- Auto Tracking




# All in One Camera

GV-PPTZ14021 (20x) and GV-PPTZ14031 (30x) are 360° anti-blindspot network cameras, that combine the panorama feature of a 12MP fisheye camera with the tracking and zoom agility of a 2MP PTZ.



## Simplified Installation


GV-PPTZ Series is designed for easy installation to help you save on time and cost.

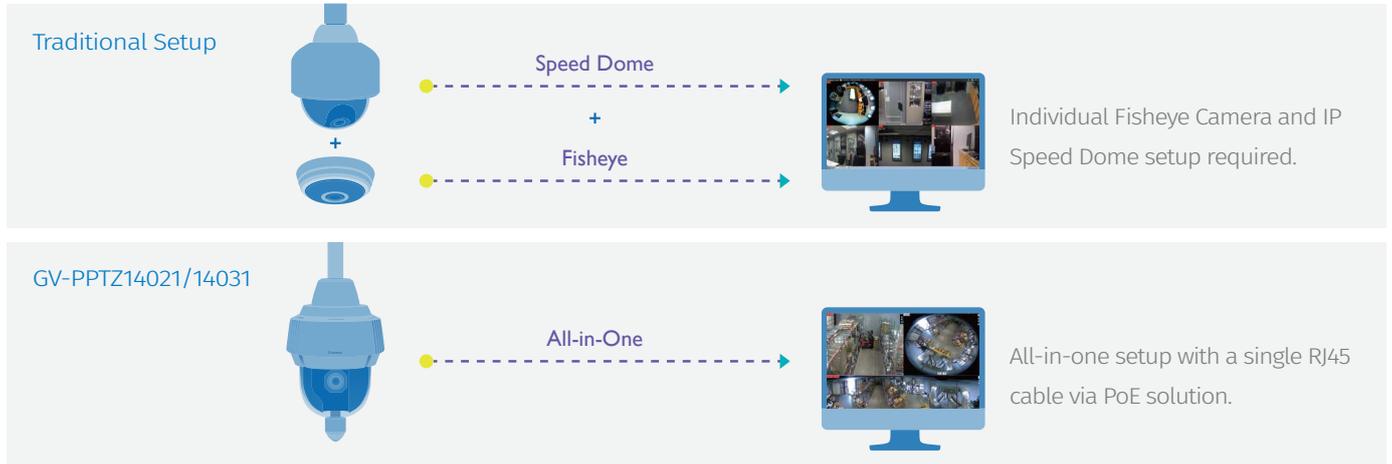

## Application



How It Works?

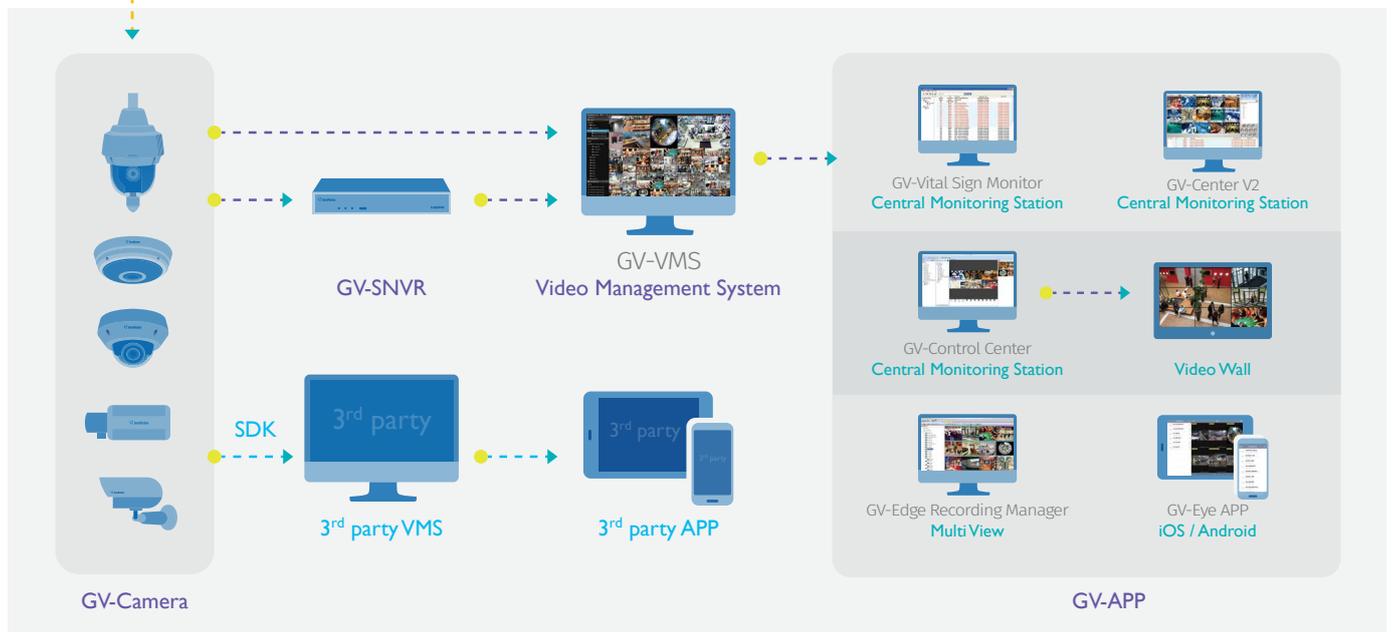

## 360° Panoramic View and Intuitive PTZ Control

These revolutionary models, which integrate the utility of fisheye lens with a 20x / 30x zoom module, allow users to achieve 360° panoramic view without losing any detail while simultaneously able to perform pan / tilt / zoom on specific points of interest with a simple click of the mouse. To facilitate tracking, PPTZ series are equipped with an advanced zoom module to automatically track moving objects within the range of view.


### Intuitive PTZ Control




Fisheye Dewarping

PIP Mode

### Single Fisheye covers all angles and sees everything

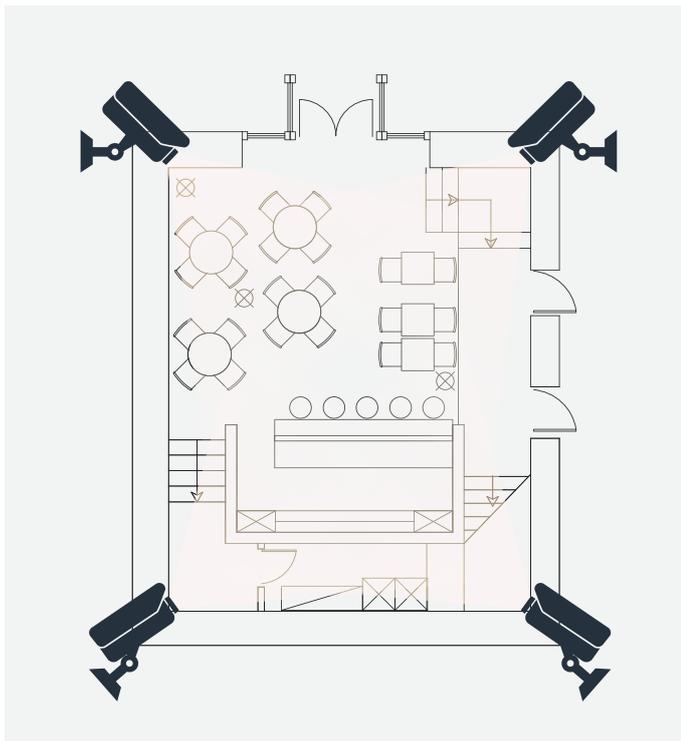

Traditional cameras x 4

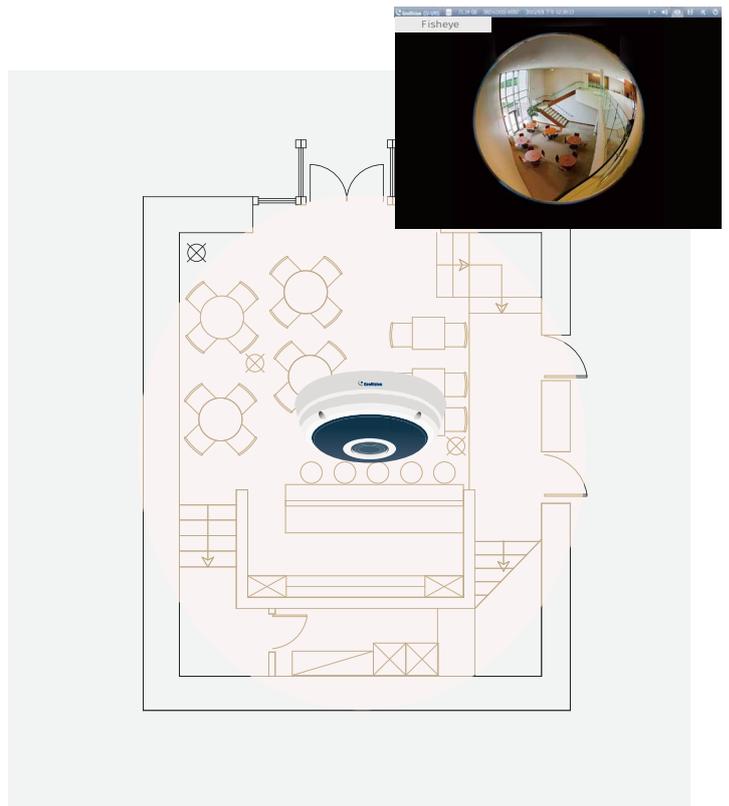

GV-Fisheye camera x 1

## Product Spec

### GV-PPTZI402I

#### 14MP H.265 20x Zoom Low Lux WDR Pro Panoramic PTZ IP Camera

- FE: Up to 15 fps at 4000 × 3000
- SD: Up to 60 fps at 1920 × 1080
- SD: 20x optical zoom
- Two-way Audio
- Pan travel 360° endless
- Tilt travel +110°~-110°
- Manual speed 0.5° ~ 460°/sec
- -40°C ~ 50°C (-40°F ~ 122°F)
- IP67 & IK10 for metal casing

### GV-PPTZI403I

#### 14MP H.265 30x Zoom Low Lux WDR Pro Panoramic PTZ IP Camera

- FE: Up to 15 fps at 4000 × 3000
- SD: Up to 60 fps at 1920 × 1080
- SD: 30x optical zoom
- Two-way Audio
- Pan travel 360° endless
- Tilt travel +110°~-110°
- Manual speed 0.5° ~ 460°/sec
- -40°C ~ 50°C (-40°F ~ 122°F)
- IP67 & IK10 for metal casing



## Mount

### GV-Mount102 Straight Tube Box Mount



- Dimensions: 256 × 256 × 316 mm (10.1 × 10.1 × 12.4")
- Weight: 66 kg (14.6 lb)

### GV-Mount103 Straight Tube Mount



- Dimensions: 219 × 125 × 340 mm (8.6 × 4.9 × 13.4")
- Weight: 2.2 kg (4.9 lb)

### GV-Mount908-3 In-Ceiling Mounting Kit



- Dimensions: 205 × 128 × 227 mm (8.1 × 5 × 8.9")
- Weight: 3 kg (6.6 lb)

### GV-Mount207 Pendant Tube



- Dimensions: 151.6 × 203.6 × 302.8 mm (5.97 × 8.02 × 11.92")
- Weight: 1.43 kg (3.15 lb)